

K6-1



K6-1


Spindle clamp

Suitable for damper spindles 16...20 mm diameter.



The spindle clamp is secured to the actuator by means of a circlip.

KH-LF (Application example see page 14)



KH-LF

Crank arm with slot width 8.2 mm

Suitable for damper spindles 8...16 mm diameter.



The crank arm is secured to the actuator by means of a circlip.

ZDB-LF (Application example see page 13)



KH-LF1

Crank arm with slot width 8.2 mm

Suitable for damper spindles 16...20 mm diameter.




The crank arm is secured to the actuator by means of a circlip.

ZDB-LF

Angle of rotation limiting and pointer

The pointer is secured to the actuator by means of a circlip.

ZG-LF1 (Application example see page 14, fig. 1)

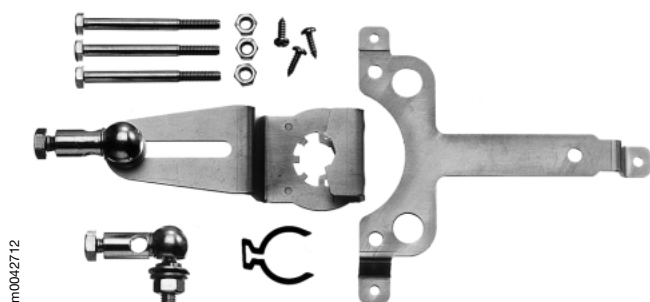


ZG-LF1

Damper linkage kit for flat mounting (with 2 ball joints KG8)

ZG-LF2

Damper linkage kit for flat mounting (without ball joints KG8)

ZG-LF3 (Application example see page 14, fig. 2)

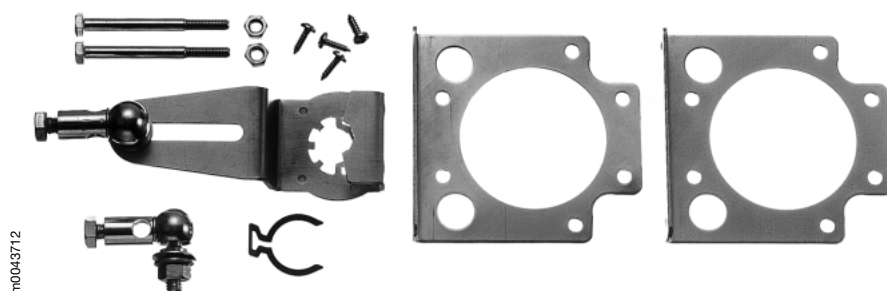

ZG-LF3

Damper linkage kit for side mounting (with 2 ball joints KG8)